


# iCLASS<sup>®</sup>

13.56 MHz Contactless Cards and Readers



**ACCESS SECURE IDENTITY**

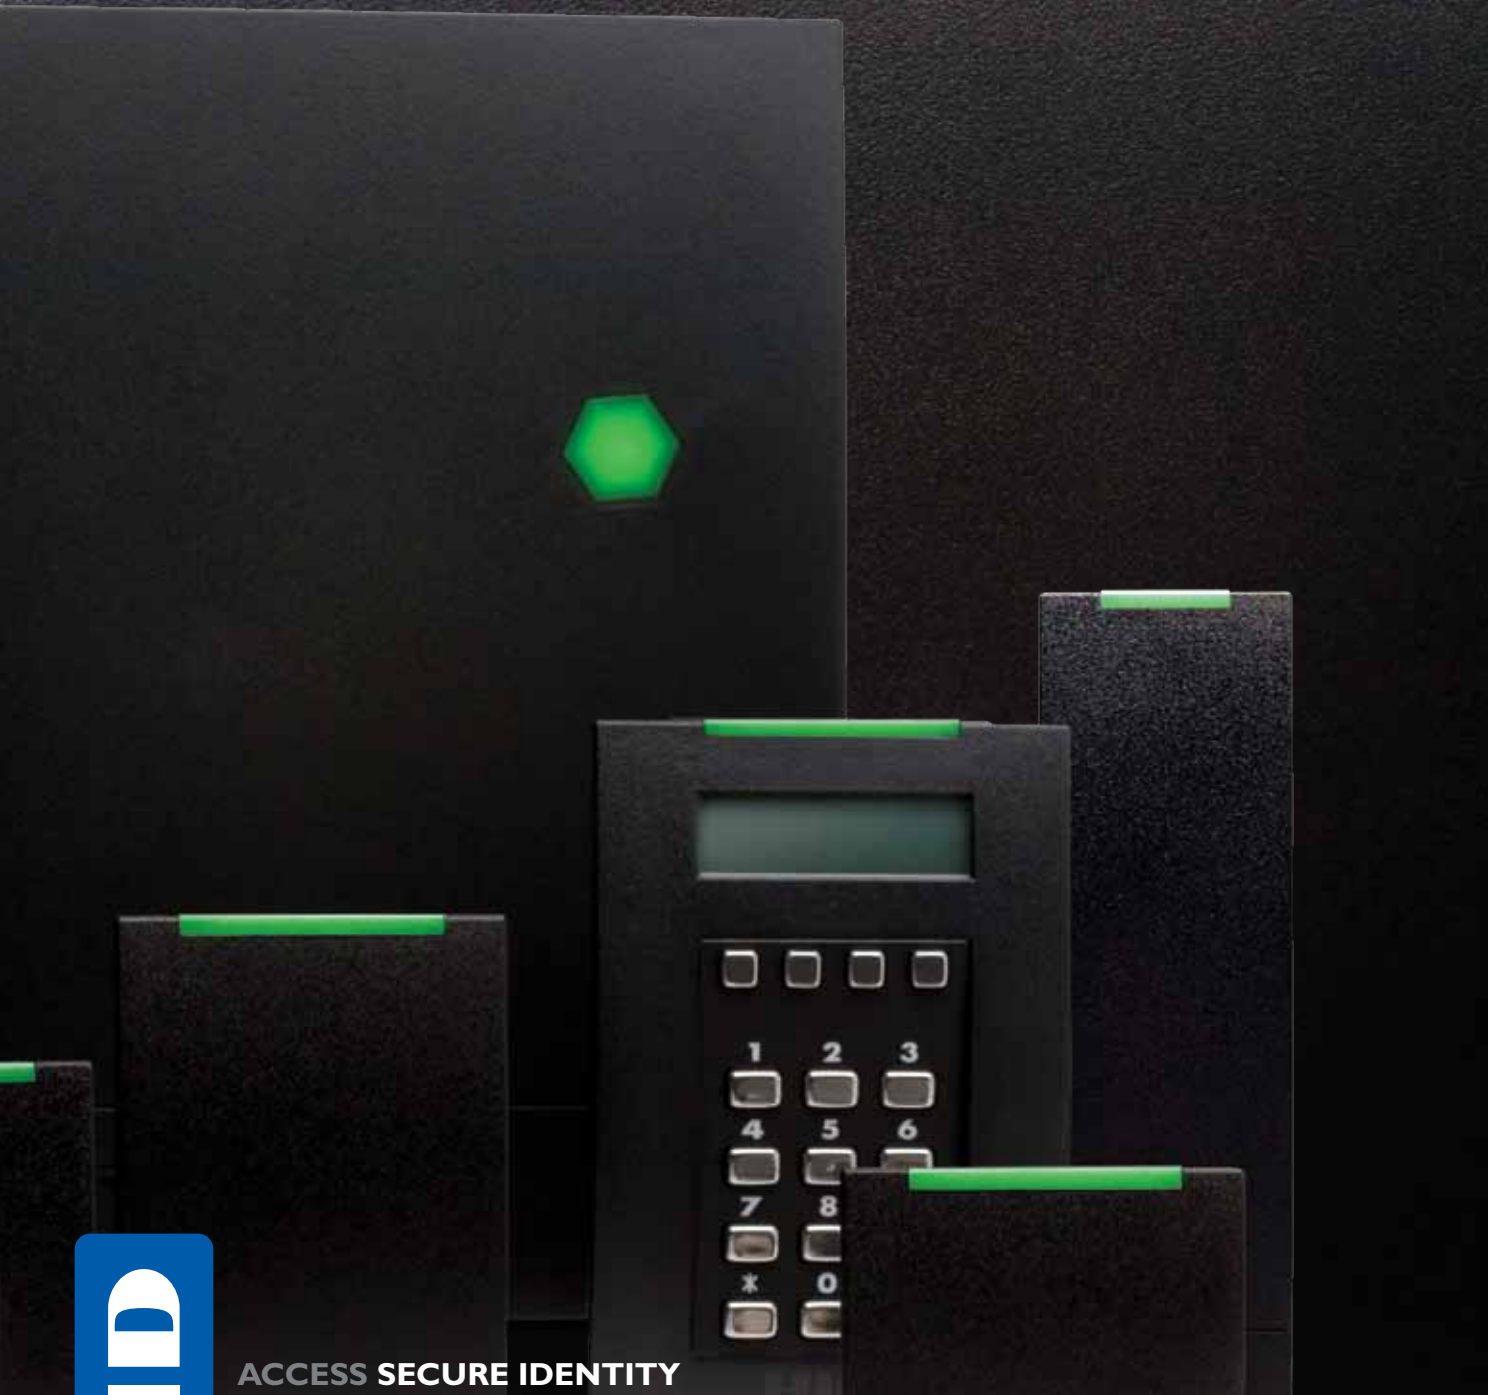

HID Global is focused on creating customer value as the trusted source for products, services and know-how related to the delivery of secure identity.

Optimized to make physical access control more powerful, iCLASS<sup>®</sup> 13.56 MHz read/write contactless smart card technology provides versatile interoperability and supports multiple applications such as biometric authentication, cashless payment and PC log-on security.



iCLASS smart cards and readers make access control more powerful and more versatile, offering enhanced security through encryption and mutual authentication. At the same time, iCLASS is user-friendly, delivering the convenience, affordability and reliability of contactless technology for which HID is known worldwide.

### **Encrypted Communication**

The communication between an iCLASS reader and card is encrypted using a secure algorithm so the transaction between the card and reader cannot be “sniffed” and replayed to a reader. The encryption protocol uses a combination of diversified keys, unique 64-bit card serial numbers and mutual card and reader authentication.

### **Capability to Add Other Applications**

The iCLASS chip not only stores HID access control information, it also has memory space available for other applications. iCLASS cards are currently available with 2k bit, 16k, and 32k bit memory capacities, and depending on the amount of memory available and the number of memory areas, iCLASS cards can serve as multi-application credentials that can be used for many purposes. Since the memory can securely store any kind of information, applications for iCLASS include biometrics, secure computer/network authentication, health record management, time and attendance, digital cash (cafeteria & vending) and many, many more.

Imagine an affordable, single-card, contactless solution that allows you to not only read data securely and quickly, but also to securely write data to the card for many applications.

# iCLASS<sup>®</sup> Readers

## iCLASS<sup>®</sup> R10

### Contactless Smart Card Reader

Base Part Number • 6100, 6108, 6109

- Slim design is perfect for metal mullions or any other space-limited installation
- Provides Wiegand or Clock-and-Data output
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Choice of Pigtail or Terminal Strip
- Dimensions: 4.0" x 1.9" x 0.9" (10.3 cm x 4.8 cm x 2.3 cm)
- Read Range: up to 3.25" (8.25 cm)\*\*



(Black, Gray)

FIPS 201 Approved. Call for details **800-872-5359**



## iCLASS<sup>®</sup> R15

### Contactless Smart Card Reader

Base Part Number • 6140, 6142, 6148, 6149

- Slim design is perfect for metal mullions or any other space-limited installation
- Provides Wiegand or Clock-and-Data output
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Choice of Pigtail or Terminal Strip
- Dimensions: 6.0" x 1.9" x 0.9" (15.3 cm x 4.8 cm x 2.3 cm)
- Read Range: up to 3.5" (8.89 cm)\*\*



(Black, Gray)

FIPS 201 Approved. Call for details **800-872-5359**



## iCLASS<sup>®</sup> R30

### Contactless Smart Card Reader

Base Part Number • 6110, 6112, 6118, 6119

- EU/Asian Back Box
- Provides Wiegand or Clock-and-Data output
- Choice of Pigtail or Terminal Strip
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Dimensions: 3.3" x 3.3" x 0.9" (8.4 cm x 8.4 cm x 2.3 cm)
- Read Range: up to 4.0" (10.2 cm)\*\*



(Black, Gray)

FIPS 201 Approved. Call for details **800-872-5359**



\* FeliCa requires iCLASS Transit Reader.

\*\* Typical iCLASS 2K read range; results vary with installation conditions and credential type



## FIPS 201 Readers are designed for government agencies and contractors.

HID's FIPS 201 readers are GSA approved and included in the U.S. General Services Administration (GSA) FIPS 201 Approved Products List. Additionally, these readers read all of HID's family of iCLASS contactless smart cards. Contact HID for Order Guides.



**iCLASS® R40**  
**Contactless Smart Card Reader**

**Base Part Number • 6120, 6122, 6128, 6129**

- U.S./EU/Asian Back Box
- Provides Wiegand or Clock-and-Data output
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Choice of Pigtail or Terminal Strip
- Dimensions: 4.8" x 3.3" x 1.0" (12.2 cm x 8.4 cm x 2.4 cm)
- Read Range: up to 4.75" (12.1 cm)\*\*



FIPS 201 Approved. Call for details **800-872-5359**



**iCLASS® RK40**  
**Contactless Smart Card Keypad Reader**

**Base Part Number • 6130, 6132, 6138, 6139**

- Dual-factor authentication with keypad
- Provides Wiegand or Clock-and-Data output
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Choice of Pigtail or Terminal Strip
- Illuminated keypad
- Dimensions: 4.8" x 3.3" x 1.1" (12.2 cm x 8.5 cm x 2.8 cm)
- Read Range: up to 4.0" (10.2 cm)\*\*



FIPS 201 Approved. Call for details **800-872-5359**



\*\* Typical iCLASS 2K read range; results vary with installation conditions and credential type



**iCLASS® RKL55**  
**Contactless Smart Card LCD Keypad Reader**

**Base Part Number • 6170, 6172, 6178**

- LCD guides user through reader usage
- Dual factor authentication with keypad
- Provides Wiegand or Clock-and-Data output
- Reads 13.56 MHz: HID iCLASS, ISO 15693 CSN, ISO 14443A (MIFARE) CSN, ISO 14443B CSN, FeliCa IDm\*, and FIPS 201
- Terminal strip only
- Dimensions: 6.1" x 4.2" x 4.5" (15.6 cm x 10.6 cm x 3.7 cm)
- Read Range: up to 4.0" (10.2 cm)\*\*



**iCLASS® R90 Long Range Reader**  
**Contactless Smart Card Reader**

**Base Part Number • 6150**

- Long read range distance (up to 18 inches or 45 centimeters)
- Reads all HID iCLASS credentials
- "Parking Hold" feature allows connection to a loop detector to ensure accurate detection of vehicles in parking lanes
- With a multicolor LED and beeper which can be controlled internally or at host
- Two R90 units can operate one meter apart for "HI-LO" truck and car installations
- 12-24 VDC
- Terminal Strip only
- Dimensions: 12.0" x 12.0" x 1.25" (30.48 cm x 30.48 cm x 3.175 cm)
- Read Range: up to 18.0" (45.7 cm)\*\*



FIPS 201 Approved. Call for details **800-872-5359**

\* FeliCa requires iCLASS Transit Reader.

\*\* Typical iCLASS 2K read range; results vary with installation conditions and credential type

# iCLASS® Readers/Writers

## Did You Know?

iCLASS Readers can read MIFARE and DESFire Card Serial Numbers (CSN).

### iCLASS® RW100

Contactless Smart Card Reader/Writer

Base Part Number • 6101

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- Mullion mount
- Offers read/write application to iCLASS credentials
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Dimensions: 4.0" x 1.9" x 0.9" (10.3 cm x 4.8 cm x 2.3 cm)
- Read Range: up to 3.25" (8.25 cm)\*

 (Black, Gray)



### iCLASS® RW150

Contactless Smart Card Reader/Writer

Base Part Number • 6141

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- Mullion mount
- Offers read/write application to iCLASS credentials
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Dimensions: 6.0" x 1.9" x 0.9" (15.3 cm x 4.8 cm x 2.3 cm)
- Read Range: up to 3.5" (8.9 cm)\*

 (Black, Gray)



### iCLASS® RW300

Contactless Smart Card Reader/Writer

Base Part Number • 6111

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- EU/Asian Back Box Size
- Offers read/write application to iCLASS credentials
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Also provides a standard Wiegand output
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Dimensions: 3.3" x 3.3" x 0.9" (8.38 cm x 8.38 cm x 2.3 cm)
- Read Range: up to 4.0" (10.2 cm)\*

 (Black, Gray)



\* Typical iCLASS 2K read range; results vary with installation conditions and credential type



## **iCLASS® RW400**

### **Contactless Smart Card Reader/Writer**

#### **Base Part Number • 6121**

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- U.S./EU/Asian Back Box
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Offers Read/Write application to iCLASS credentials
- Ideal for access control, health records time and attendance and digital cash
- Low Voltage and Current Consumption (5-16 VDC @ <100 mA)
- Dimensions: 4.8" x 3.3" x 1.0" (12.2 cm x 8.4 cm x 2.4 cm)
- Read Range: up to 4.75" (12.1 cm)\*\*

  (Black, Gray)



## **iCLASS® RWK400**

### **Contactless Smart Card Keypad Reader/Writer**

#### **Base Part Number • 6131**

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- U.S./EU/Asian Back Box
- Present a card and use a PIN number for dual verification of identity
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Terminal Strip only
- Dimensions: 4.8" x 3.3" x 1.1" (12.2 cm x 8.5 cm x 2.8 cm)
- Read Range: up to 4.0" (10.2 cm)\*

  (Black, Gray)



## **RWKL550 Smart Card Reader**

### **Contactless Smart Card LCD Keypad Reader/Writer**

#### **Base Part Number • 6171**

- Store data remotely on iCLASS card for time and attendance, biometric applications and much more
- LCD guides user through reader usage
- Dual-factor authentication with keypad
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Terminal strip only
- Dimensions: 6.1" x 4.2" x 4.5" (15.6 cm x 10.6 cm x 3.7 cm)
- Read Range: up to 4.0" (10.2 cm)\*

 (Black)

\* Typical iCLASS 2K read range; results vary with installation conditions and credential type

# iCLASS<sup>®</sup> Biometric Readers



**bioCLASS™ is HID's iCLASS family of biometric products.** Using 13.56 MHz contactless smart card technology, bioCLASS products provide users with new options for supporting multi-authentication of identity.

Combine a contactless card presentation with a fingerprint biometric or use a personal identification number (PIN) number along with a contactless card presentation.

The bioCLASS products provide three levels of fingerprint verification. During the enrollment process, the RWKLB575 is connected to your PC via a USB port. The software will guide the user to place their finger on the sensor. The fingerprint template is collected at the unit and immediately transferred to the card. During this enrollment process, the fingerprint template is stored **ONLY** on the card; it is never transmitted to an external host. During verification at the door, the LCD graphical display will assist the user with instructions about finger placement on the biometric sensor.

---

## bioCLASS™ BIO500

### Fingerprint Biometric Verification Module

Base Part Number • 6190

- Fingerprint biometric module for the RWKLB575
- Centered finger pad offers ease-of-use for right-or left handed individuals
- Location of pad is compliant with ADA standards
- Dimensions: 8.2" x 4.2" x 2.3" (20.8 cm x 10.6 cm x 5.8 cm)

 (Black)



---

## bioCLASS™ RKL57

### Contactless Smart Card Biometric Reader

Base Part Number • 6180, 6188

- Reads fingerprint template from iCLASS card and verifies against live finger
- LCD guides user through biometric authentication and reader usage
- Three-factor authentication with fingerprint and keypad
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Reads all HID iCLASS and ISO 14443/15693 compatible (CSN) credentials
- Terminal strip only
- Dimensions: 8.5" x 4.2" x 2.3" (21.4 cm x 10.6 cm x 5.8 cm)
- Read Range: up to 4.0" (10.2 cm)\*

 (Black)



---

## bioCLASS™ RWKLB575

### Contactless Smart Card Biometric Reader/Writer

Base Part Number • 6181

- Reads fingerprint template from iCLASS card and verifies against live finger
- Allows developers to remotely administer enrollment process from enrollment software
- LCD guides user through biometric authentication and reader usage
- Three-factor authentication with fingerprint and keypad
- Provides a bi-directional RS232, RS485, USB or UART connection to a PC or microcontroller
- Terminal strip only
- Dimensions: 8.5" x 4.2" x 2.3" (21.4 cm x 10.6 cm x 5.8 cm)
- Read Range: up to 4.0" (10.2 cm)\*

 (Black)

\* Typical iCLASS 16K read range; results vary with installation conditions and credential type



# Card Programmers

The iCLASS® CP400 and CP575A Card Programmers are designed for on-site programming of access control data, Personal Identification Number (PIN) codes and user data onto HID iCLASS cards. They allow HID proximity formats, keypad PIN codes and user data fields to be programmed directly into iCLASS contactless smart cards. This enables the system manager to stock configured cards and program cards on demand when new cardholders are added to the system. To ensure security of the format and cards, an iCLASS Card Programmer license is required.

The iCLASS CP400 Card Programmer includes a desktop reader/writer, CD-ROM with programming software and documentation, personalization diskette, universal power supply and serial cable.

The iCLASS CP575A Card Programmer adds fingerprint template programming capability for use with the bioCLASS reader. The iCLASS CP575A includes a desktop reader/writer, CD-ROM with programming software and documentation, personalization diskette, universal power supply and USB cable.



## **CP400 Card Programmer** **Contactless Smart Card Programmer**

**Base Part Number • 3150**

- Stores PIN codes on the card for use with the iCLASS RK40, RWK400, RKL550, RWKL550, RKL575 and RWKL575
- Programs four, 16-character user data fields on the card, that can later be read on the programmer
- Reads any iCLASS card when the authentication key is pre-stored in the programmer
- Prints card numbers directly onto the cards using a PVC card printer or on standard Avery labels
- Maintains a secure, encrypted database on a personal computer
- Personalized for individual customers (proprietary formats are restricted to authorized users)



## **CP575 Card Programmer** **Contactless Smart Card Programmer**

**Base Part Number • 6251**

- Stores PIN codes on the card for use with the iCLASS RK40, RWK400, RKL550, RWKL550, RKL575 and RWKL575
- Keypad readers configured for local PIN verification
- Programs four, 16-character user data fields on the card, that can later be read on the programmer
- Creates site-specific, high-security authentication keys that are programmed into both readers and cards
- Creates reader configuration cards to program new authentication keys into readers and change other reader operating parameters
- Reads any iCLASS card when the authentication key is pre-stored in the programmer
- Prints card numbers directly onto the cards using a PVC card printer or on standard Avery labels
- Maintains a secure, encrypted database on a personal computer
- Personalized for individual customers (proprietary formats are restricted to authorized users)
- CP575A Card Programmer provides USB user interface capability

# iCLASS<sup>®</sup> Reader Specifications



**R10/RW100**



**R15/RW150**



**R30/RW300**

<b>Base Model Number</b>	<b>R10:</b> 6100/6108/6109 <b>RW100:</b> 6101	<b>R15:</b> 6140/6142/6148/6149 <b>RW150:</b> 6141	<b>R30:</b> 6110/6112/6118/6119 <b>RW300:</b> 6111
<b>Dimensions</b>	4.04" x 1.9" x .9" (10.5 cm x 5.0 cm x 2.5 cm)	6.1" x 1.9" x 0.9" (15.5 cm x 5.0 cm x 2.5 cm)	3.3" x 3.3" x .85" (8.5 cm x 8.5 cm x 2.0 cm)
<b>Weight</b>	3.2 oz (91 g)	3.2 oz (91 g)	4.0 oz (113 g)
<b>Read Range</b>	Up to 3.25" (8.5 cm)	Up to 3.5" (9.0 cm)	Up to 4.0" (10.0 cm)
<b>Mounting</b>	Mullion	Mullion, Fits footprint of HID MiniProx reader.	Standard EU/Asian back boxes
<b>Power Supply</b>	5-16 VDC, Linear supply recommended		
<b>Current Requirements</b>	55/116 mA	55/112 mA	55/121 mA
<b>Termination</b>	<b>R10:</b> Pigtail or Terminal Strip <b>RW100:</b> Terminal Strip	<b>R15:</b> Pigtail or Terminal Strip <b>RW150:</b> Terminal Strip	<b>R30:</b> Pigtail or Terminal Strip <b>RW300:</b> Terminal Strip
<b>Output Formats</b>	<b>R10:</b> Wiegand, Clock-and-Data <b>RW100:</b> Wiegand, RS232, RS485, USB, UART	<b>R15:</b> Wiegand, Clock-and-Data <b>RW150:</b> Wiegand, RS232, RS485, USB, UART	<b>R30:</b> Wiegand, Clock-and-Data <b>RW300:</b> Wiegand, RS232, RS485, USB, UART
<b>FIPS 201 Certification</b>	Yes		
<b>Tamper</b>	Optical		
<b>Indoor/Outdoor</b>	Both (IP55 Certified)		
<b>Warranty</b>	Lifetime		



**R40/RW400**



**RK40/RWK400**



**R90**



**RKL55/  
RWKL550**



**RKLB57/  
RWKL575**

	<b>R40:</b> 6120/6122/6128/6129 <b>RW400:</b> 6121	<b>RK40:</b> 6130/6132/6138/6139 <b>RWK400:</b> 6131	6150	<b>RKL55:</b> 6170/6172/6178 <b>RWKL550:</b> 6171	<b>RKLB57:</b> 6180/6188 <b>RWKL575:</b> 6181
	4.8" x .3.3" x 95" (12.0 cm x 8.5 cm x 2.0 cm)	4.8" x 3.3" x 1.1" (12.0 cm x 8.5 cm x 2.5 cm)	12.0" x 12.0" x 1.25" (30.5 cm x 30.5 cm x 3.0 cm)	6.14" x 4.17" x 1.48" (15.5 cm x 10.5 cm x 4.0 cm)	8.34" x 4.17" x 2.3" (21.0 cm x 10.5 cm x 4.0 cm)
	8.8 oz (250 g)	10.0 oz (283 g)	60.0 oz (1.86 kg)	12.69 oz (360 g)	17.12 oz (485 g)
	Up to 4.75" (12.1 cm)	Up to 4.0" (10.0 cm)	Up to 18.0" (45.5 cm)	Up to 4.0" (10.0 cm)	
	U.S./EU/Asian back box		Reader body fits onto base mounting plate. Cover fits over reader body, secured with four screws.	U.S./EU/Asian back box	
	5-16 VDC, Linear supply recommended		12-24 VDC reverse voltage protected, Linear supply recommended	9-12 VDC	
	<b>R40:</b> 55/121 mA <b>RW400:</b> 55/132 mA	<b>RK40:</b> 85/116 mA <b>RWK400:</b> 85/132 mA	420/1300 mA @ 12 VDC 210/700 mA @ 24 VDC	<b>RKL55:</b> 160/250 mA <b>RWKL550*:</b> 160/250 mA	<b>RKLB57:</b> 270 mA/328 mA <b>RWKL575*:</b> 270 mA/328 mA
	<b>R40:</b> Pigtail or Terminal Strip <b>RW400:</b> Terminal Strip	<b>RK40:</b> Pigtail or Terminal Strip <b>RWK400:</b> Terminal Strip	Terminal Strip		
	<b>R40:</b> Wiegand, Clock-and-Data <b>RW400:</b> Wiegand, RS232, RS485, USB, UART	<b>RK40:</b> Wiegand, Clock-and-Data <b>RWK400:</b> Wiegand, RS232, RS485, USB, UART	Wiegand, Clock-and-Data	<b>RKL55:</b> Wiegand, Clock-and-Data <b>RWKL550:</b> Wiegand, RS232, RS485, USB, UART	<b>RKLB57:</b> Wiegand, Clock-and-Data <b>RWKL575:</b> Wiegand, RS232, RS485, USB, UART
	Yes		No		
	Optical		Switch	Optical	
	Both (IP55 Certified)			Indoor	
	Lifetime			One Year	

\* Add 40 mA current draw for USB expansion module. Add 10 mA current draw for RS232, RS485 or UART expansion modules

# iCLASS<sup>®</sup> Credentials



## All iCLASS Credentials Feature:

- iCLASS credentials come as cards, tags, and keys.
- 13.56 MHz read/write contactless smart card technology, providing high-speed, reliable communications with superior data integrity.
- The ability to store biometric templates and useful data using read/write capabilities.
- Communications between card and reader that include high security with mutual authentication, encrypted data transfer, and 64-bit diversified keys for read/write.
- Advanced key management systems to reduce the risk of compromised data or duplicated cards.
- Supports all existing HID card formats, including Corporate 1000.
- The ability to factory or field\* program any existing HID format into the secure HID access control application area.
- A choice of 2k bits (256 Bytes), 16k bits (2k Bytes) or 32k bits (4k Bytes) memory capacity.
- Lifetime warranty provided for all iCLASS credentials!

*\*Consult factory for availability of the iCLASS Card Programmer, CP400*

## **iCLASS<sup>®</sup> Card**

### **13.56 MHz Contactless Smart Card**

#### **Base Part Number • 200**

- Ability to add a magnetic stripe, barcode, anti-counterfeiting feature, custom artwork, or photo ID
- Meets ISO standards for thickness for use with direct image and thermal transfer printers
- Magnetic Stripe optional



## **iCLASS<sup>®</sup> Embeddable Card**

### **13.56 MHz Contactless Smart Card**

#### **Base Part Number • 211\***

- Designed to be embedded with an optional contact smart chip module of your choice
- Enables contact smart chip applications to be added to iCLASS cards in a single ISO standard thickness card
- Offers the ability to add a magnetic stripe, barcode, anti-counterfeiting feature, custom artwork, or photo ID
- Meets ISO standards for thickness for use with direct image and thermal transfer printers



## **iCLASS<sup>®</sup> Prox Card**

### **13.56 MHz Contactless Smart Card and 125 kHz Proximity Card**

#### **Base Part Number • 202**

- 13.56 MHz iCLASS read/write technology and 125 kHz proximity technology in a single ISO standard thickness card
- Enables contactless smart card applications to be added to an existing proximity technology access control system
- Offers the ability to add a magnetic stripe, barcode, anti-counterfeiting feature, custom artwork, or photo ID
- Meets ISO standards for thickness for use with direct image and thermal transfer printers



*\* Base part number does not include contact chip*



## **iCLASS® Prox Embeddable Card**

**13.56 MHz Contactless Smart Card With 125 kHz Proximity**  
**Base Part Number • 213**

- Designed to be embedded with an optional contact smart chip module of your choice
- Enables contact smart chip applications to be added to iCLASS cards in a single ISO standard thickness card
- Offers the ability to add a magnetic stripe, barcode, anti-counterfeiting feature, custom artwork, or photo ID
- Meets ISO standards for thickness for use with direct image and thermal transfer printers
- Optional Contact Smart Chip Module



## **iCLASS® Clamshell Card**

**Value Price 13.56 MHz Contactless Smart Card**  
**Base Part Number • 208**

- Provides contactless smart card technology in a cost-effective card package
- An ABS shell construction that provides durability in harsh environments



## **iCLASS® Wiegand Card**

**13.56 MHz Contactless Smart Card and Wiegand Technology**  
**Base Part Number • 204**

- Offers a one-card solution combining iCLASS and Wiegand technologies
- Ideal for companies transitioning from Wiegand technology to an HID iCLASS-based system
- Offers the ability to add a magnetic stripe, barcode, anti-counterfeiting feature, custom artwork, or photo ID
- Card thickness is suitable for use with all Wiegand readers, and most direct image printers and magnetic stripe readers (nominal thickness .037")
- Optional magnetic stripe



## **iCLASS® Key II**

**Convenient 13.56 MHz Contactless SmartKey**  
**Base Part Number • 205**

- Incorporates iCLASS contactless read/write technology into a convenient device approximately the size of an automotive key
- Molded plastic enclosure provides durability in harsh environments
- Provides an external number for easy identification and control
- Can be placed on a key ring or clipped to a lanyard for convenient entry



## **iCLASS® Tag**

**13.56 MHz Contactless Smart Tag With Adhesive Back**  
**Base Part Number • 206**

- Provides the convenience of HID's iCLASS contactless read/write technology in a small disk-shaped package
- Seamlessly upgrade from Wiegand, magnetic stripe, barium ferrite, or proximity technologies by adhering the Tag to an existing access card\*
- Allows users to easily and cost-effectively turn a plastic ID badge or contact smart chip card into a contactless smart card
- Attaches easily to cell phones, PDAs, and other non-metallic objects

 (Black, Gray)

\* Consult HID for specific guidelines for actual placement. Not for use with cards used with tractor feed (full insertion) readers.

# iCLASS<sup>®</sup> Credential Specifications

## iCLASS Meets Industry Standards

The development team at the Identification Technology Group of ASSA ABLOY has utilized advanced semiconductor technology based on the 13.56 MHz frequency to meet numerous ISO standards. iCLASS readers can read data from cards compliant with the following standards:

ISO 15693 - read/write; 2k bits (256 Bytes), 16k bits (2k Bytes), and 32k bits (4k Bytes)

ISO 14443, Type A - read only; MIFARE<sup>®</sup> (serial number)\*

ISO 14443, Type B2 - read/write; 2k bits (256 Bytes), 16k bits (2k Bytes), and 32k bits (4k Bytes)

Meeting the standards above is important in smart card technology because they enable many equipment and application developers to work with this technology to create a broader range of uses for the card.

\*The R90 is an ISO 15693 reader and will not read MIFARE cards



	iCLASS <sup>®</sup> Clamshell	iCLASS <sup>®</sup> Card	iCLASS <sup>®</sup> Card Embeddable
<b>Base Part Number</b>	2080	200X/210X	211X
<b>Read Range: *</b>			
<b>R10/RW100</b>	Up to 2.5" (6.5 cm)	Up to 3.25" (8.0 cm)	
<b>R30/RW300</b>	Up to 3.0" (7.5 cm)	Up to 4.0" (10.0 cm)	
<b>R40/RW400</b>	Up to 4.5" (10.0 cm)	Up to 4.25" (11.0 cm)	
<b>RK40/RK400</b>	Up to 4.0" (9.0 cm)	Up to 3.5" (9.0 cm)	
<b>Memory Size/ Application Areas</b>	2k bits with two areas	2k bits with two application areas; 16k bits with two application areas (16k/2); 16k bits with 16 application areas (16k/16); 32k bits (16k/2+16k/1); 32k bits (16k/16+16k/1)	
<b>HID Proximity 125 kHz</b>	No		
<b>Contact Smart Chip Module Embeddable</b>	No	Yes**	
<b>Wiegand Strip</b>	No		
<b>Magnetic Stripe</b>	No	Optional	
<b>Printable ***</b>	Yes		
<b>Standard HID Artwork</b>	Optional		
<b>Slot Punch</b>	Vertical Included	Vertical Optional	
<b>Visual Security Options</b>	N/A	Yes	
<b>Additional Security Options</b>	Corporate I000, iCLASS Elite		
<b>Warranty</b>	Lifetime		

\* Dependant upon installation conditions.

\*\* Contact smart chip module not included. Ask about HID's SMARTS Program for off-the-shelf contact smart chip embedded cards.

\*\*\* Some types of printing processes can take these credentials out of ISO compliance for thickness. Consult factory for more information.

# Did You Know...

...the same card data formats used in HID Prox are all available in iCLASS?



**iCLASS® Prox**



**iCLASS® Prox Embeddable**



**iCLASS® Wiegand**



**iCLASS® Key II**



**iCLASS® Tag**

	202X/212X	213X	204X	205X	206X
	Up to 3.25" (8.0 cm)		Up to 3.0" (7.5 cm)	2" (5.1 cm)	
	Up to 4.0" (10.0 cm)		Up to 3.0" (7.5 cm)	2.2" (5.9 cm)	
	Up to 4.25" (11.0 cm)		Up to 4.5" (11.5 cm)	2.7" (7.0 cm)	
	Up to 3.5" (9.0 cm)		Up to 2.5" (6.5 cm)	2" (5.1 cm)	
	2k bits with two application areas; 16k bits with two application areas (16k/2); 16k bits with 16 application areas (16k/16); 32k bits (16k/2+16k/1); 32k bits (16k/16+16k/1)				
	Yes		No		
	No	Yes**	No		
	No		Yes	No	
	Optional			No	
	Yes			No	
	Optional			Yes	Yes
	Vertical Optional		Horizontal or Vertical Optional	Key Ring Hole	No
	Yes			N/A	
	Corporate 1000, iCLASS Elite				
	Lifetime				

**Q: Is it hard to use a smart card for access control?**

**A: It depends on what you mean by “smart card”. You see, there are two different types of smart cards. A “contactless” smart card is very easy to use for access control. A “contact” smart card is not typically used for that purpose.**

**Contact Smart Cards:**

These are what most people think of when they hear the term “smart card.” They have a microchip and a copper interface leaf embedded into the surface of the card. These cards must be inserted into a thin reader slot to be used, a process that works well in an office environment, but is not ideal for outdoor or industrial applications. Furthermore, contact smart card readers are a prime target for vandalism. Once vandalized, the reader typically must be replaced.

**Advantages:**

Contact smart cards do have some very significant advantages compared to contactless smart cards. They are available in much greater memory capacity, up to 2 Mb (2 megabits), and with more powerful microprocessors. Large memory files like high-resolution photographs and complete medical histories can fit on contact smart cards. Certain cryptographic processes used in high-security financial and legal applications can only be accomplished by utilizing contact smart cards. But for access control use, you’ll typically want to use contactless smart cards.

## **Contactless Smart Cards:**

A contactless smart card is essentially the same as any regular proximity card. It can be read (and written to) several inches from the reader, and it works really fast. Contactless cards can be programmed with a conventional card data format like 26-bit Wiegand. A compatible reader can read that data and send it on to a controller. The controller can't tell any difference compared to data from a regular proximity (or even Wiegand swipe) card.

## **Advantages:**

For access control purposes, there is little comparison. The many benefits of proximity technology have been widely accepted since 1974. Contactless smart cards used for access purposes share all of the same advantages including great ease of use, high reliability, and long life of both cards and readers. In addition, the contactless smart cards can be used to carry many types of additional binary data including the following:

- Biometric (fingerprint, hand geometry, etc.) templates
- Complex PC and network passwords for logical access security
- Formatted medical data for university, military and industrial applications.
- Money for vending, cafeteria payment, laundry and telephone use, etc.
- Building system and lighting control
- And many more

Different types of contactless cards and different memory sizes control how many and which kinds of applications can be combined on one card. The access control benefits, however, remain the same regardless of what other functions are managed by the card. None of these features can be accomplished by conventional access cards of any kind.

Choosing a contactless smart card solution for an access system gives the end user an almost unlimited range of future applications that can co-exist on the same card. The fact that smart card readers are compatible with virtually all access control panels, just like Wiegand or Prox readers, gives them a universal appeal. For any new or completely renovated access system, contactless smart cards are the way to go.

# iCLASS<sup>®</sup> Elite

As an extension of the HID Corporate 1000 Program, HID is pleased to introduce the iCLASS Elite Program, offering end-users the highest level of card-to-reader security available today!




When using iCLASS contactless smart card technology, the iCLASS Elite Program provides security professionals the ability to standardize on a “single credential” solution that can be used for all applications and locations throughout the enterprise worldwide. The mutual authentication and encryption features of the technology enhance the “peace of mind” offered by this solution.

Similar to the Corporate 1000 Program, the iCLASS Elite Program offers end-users their own proprietary key. This key protects the card number within the access control application of the card. Cards and readers are programmed in the HID factory to match. Only matching cards and readers will work together, further prohibiting cards and readers from foreign populations to enter and function within the company’s Elite secured population.

Combined with HID’s Corporate 1000 Program, the iCLASS Elite program offers customers multiple layers of card to reader security.

*\*Consult factory for availability.*

# With HID, there's more than one way to be smart.

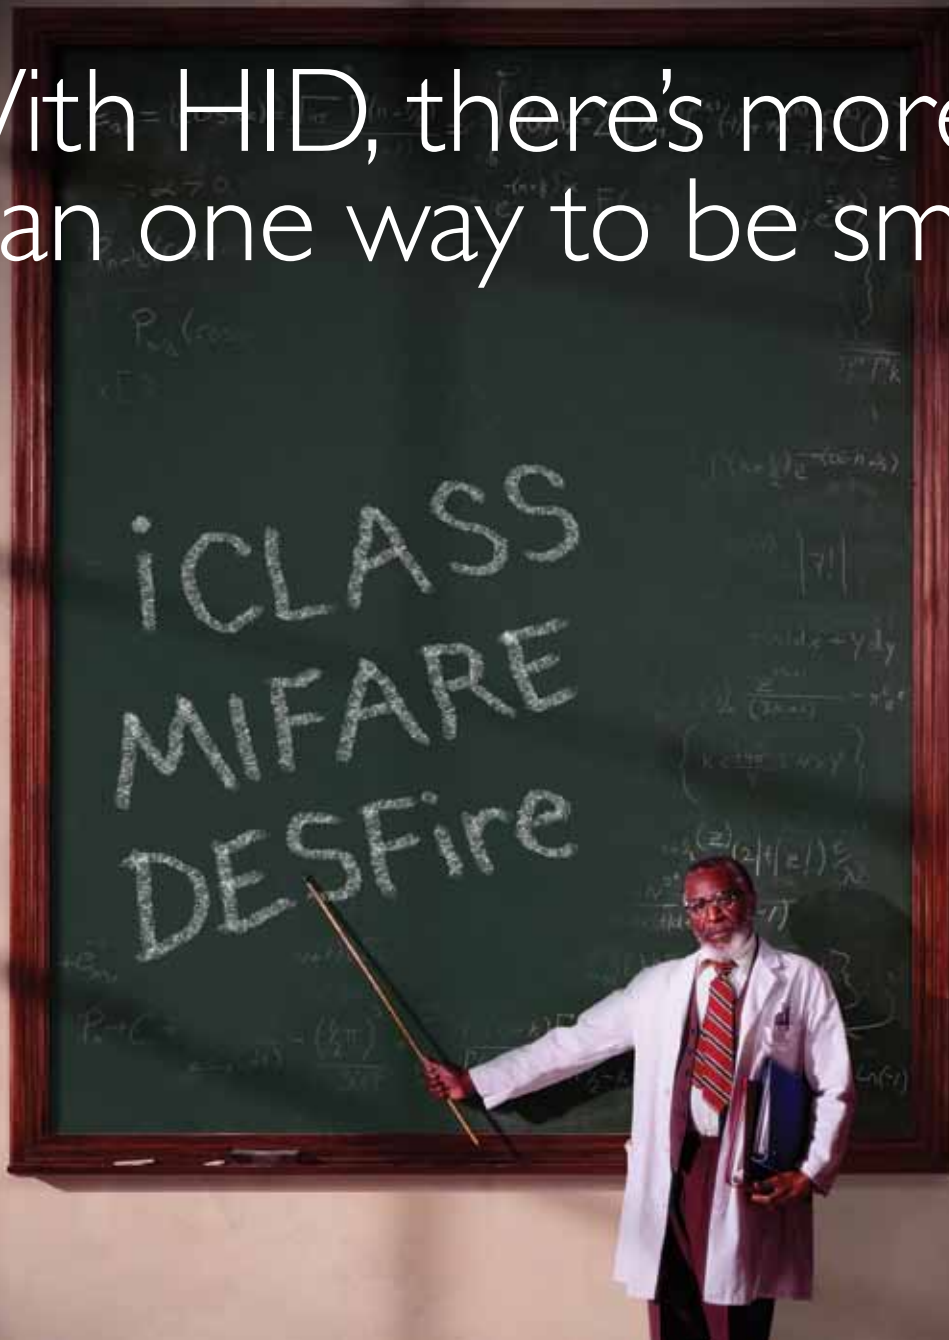

**We think 13.56 MHz smart technology is great, but an open approach is even better.**

13.56 MHz smart technology offers an unbeatable combination of enhanced security along with the ability to support other applications such as time and attendance, cashless vending and more. That's why we offer product lines featuring all of the leading smart solutions – iCLASS®, MIFARE® and DESFire® – as well as multi-technology cards and readers that can help make any migration smoother and easier. All of the solutions have their strong points, but we like to think the strongest point of all of them is the expertise and support of HID.

hidglobal.com



**ACCESS** technology.

# HID Global

## CORPORATE OFFICES

### North America

15370 Barranca Parkway  
Irvine, CA 92618  
Tel: 1 800 237 7769  
Tel: +1 949 732 2000  
Fax: +1 949 732 2360

## REGIONAL HEADQUARTERS

### Asia Pacific

19/F 625 King's Road  
North Point, Island East  
Hong Kong  
Tel: +852 3160 9800  
Fax: +852 3160 4809

### Europe, Middle East & Africa

Haverhill Business Park  
Phoenix Road  
Haverhill, Suffolk  
CB9 7AE England  
Tel: +44 (0) 1440 714 850  
Fax: +44 (0) 1440 714 840

Am Klingenberg 6a  
65396 Walluf  
Germany  
Tel: +49 6123 791 0  
Fax: +49 6123 791 199

### Latin America

Circunvalacion Ote.  
No. 201B Despacho 3  
Col. Jardines del Moral  
Leon 37160, Mexico  
Tel: +52 477 779 1492  
Fax: +52 477 779 1493



**ACCESS SECURE IDENTITY**



[hidglobal.com](http://hidglobal.com)

© 2010 HID Global Corporation. All rights reserved. HID, the HID logo, iCLASS, and the iCLASS logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

MKT\_BRO\_iCLASS\_EN, Rev. 05/2010