


PowerDsine PD-7000G High Power Family

Cost Effective 30W/Port Gigabit Midspan for High Power & 802.3af Pre-standard Terminals

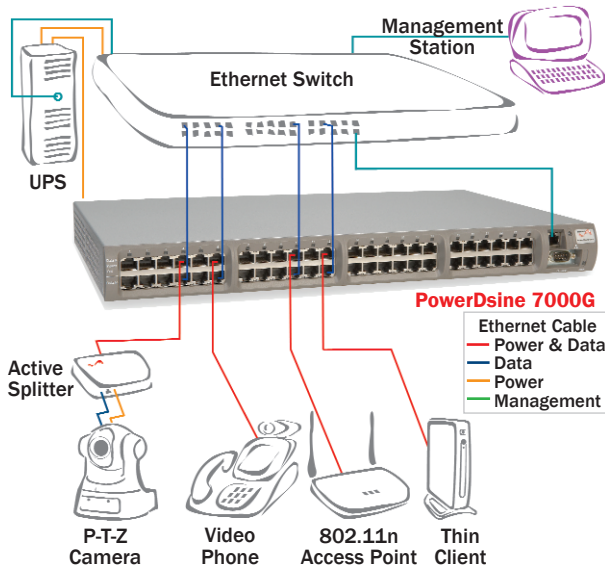

OVERVIEW

The PowerDsine 7000G Family is designed specifically to power PTZ and Dome network cameras, 802.11n Access Points, Thin Clients, Video Phones and other Ethernet end terminals that require high power. The PowerDsine 7000G Family includes 6, 12, and 24-port models and are fully backward compatible and safe to use with any 802.3af terminal such as VoIP Phones, IP Cameras and WLAN Access Points. With PowerDsine PoE Midspans, data and power flow smoothly and safely over a single LAN cable with no interference, leaving your network infrastructure completely unaltered.

For secure remote management, all PD-7000G models includes PowerView Pro management software.

PD-7000G Features

- High Power over 2-pairs – 30W per port
- 10/100/1000BaseT Gigabit Support
- Ideal for most 802.11n Access Points, WiMax CPEs, Video Phones, Access Control Units, POS Terminals
- Proved safe and reliable with existing Ethernet infrastructure
- Scalable 6, 12 & 24-port models
- 802.3af Compliant with higher power
- PowerView Pro secure, remote SNMPv3 or Web-based management included



PD-7000G SPECIFICATIONS

No. of Ports	6/12/24
Pass Through Data Rates	10/100/1000 Mbps
Power over Ethernet Output	Pin Assignment and Polarity: 4/5 (+), 7/8 (-) Output Power Voltage: -52.5Vdc User Port Power: 30W Typ. Aggregate Power: 400Watts
Input Power Requirements	AC Input Voltage: 100 to 240 Vac AC Input Current: 5.5A @ 110 Vac; 2A @ 220 Vac AC Frequency: 50 to 60 Hz
Dimensions	438 mm x 272 mm x 44 mm 17.3 in. x 10.8 in. x 1.75 in or 1U
Weight	14.3 lbs (6.5 kg)
Management	PowerView Pro included
Indicators	System Indicator: AC Power (Green) User Indicator: Channel Power (Green/Orange)
Connectors	PoE ports and management port: Shielded RJ-45, EIA 568A and 568B Console Port: DB-9, Male
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0 to 40°C) Operating Humidity: 10% to 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: 5% to 95%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Warranty	Limited lifetime (see Terms and Conditions)
Regulatory Compliance	IEEE 802.3at (PoE), RoHS Compliant VCCI, CE, C-Tick
Electromagnetic Emission & Immunity	FCC Part 15, Class B with FTP cabling EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Safety Approvals	UL/cUL Per EN 60950 GS Mark Per EN 60950

Ordering Information

Part Number	Name	Description
PD-7006G/AC/M	PowerDsine 7006G	6-port
PD-7012G/AC/M	PowerDsine 7012G	12-port
PD-7024G/AC/M	PowerDsine 7024G	24-port
Accessory	Description	
PD-AS-601	Active splitter for legacy applications	
PD-PS-401	Passive splitter for legacy Cisco applications	

Confidentiality Statement: This document contains information that is proprietary to Microsemi. As such, it is confidential and its disclosure is strictly prohibited by applicable law. If you and/or your company and Microsemi executed a Non-Disclosure Agreement, then this document is being provided in connection with the Agreement, and the information contained herein is covered by the Agreement and under its terms may not be disclosed or used and must be protected by you and/or your company.